

1. Add following to your /etc/gitlab/gitlab.rb

[/etc/gitlab/gitlab.rb](#)


```
external_url 'https://git.yourdomain.tld'  
nginx['listen_address'] = 'localhost'  
nginx['listen_port'] = 8888  
nginx['listen_https'] = false
```

2. Reconfigure gitlab-ce

```
gitlab-ctl reconfigure
```

3. Create a subdomain or domain alias

### DOMAIN-ALIAS BEARBEITEN

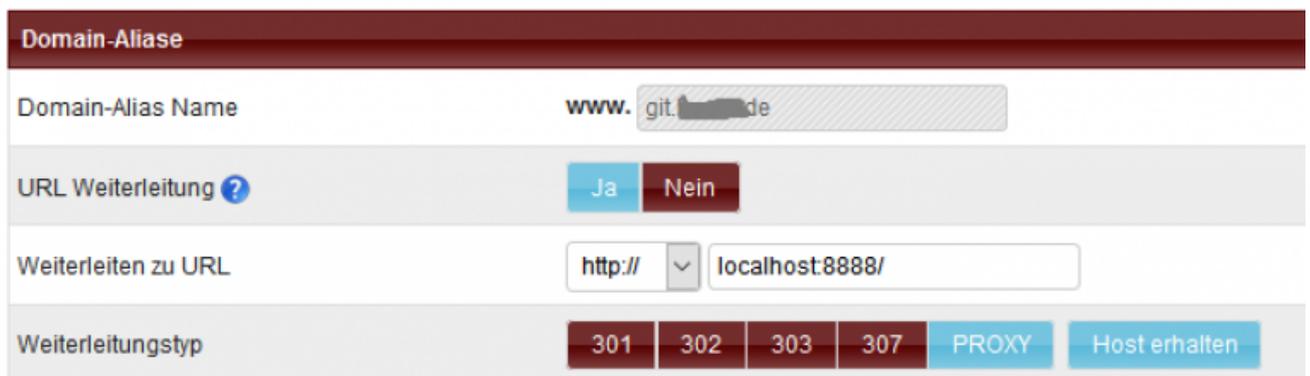

Domain-Aliase

Domain-Alias Name

URL Weiterleitung  Ja  Nein

Weiterleiten zu URL

Weiterleitungstyp  301  302  303  307  PROXY  Host erhalten

4. Enable needed headers module

```
a2enmod headers
```

5. Configure Letsencrypt entry (when available)

- \*or\*\*

6. Create certificate and copy to /etc/gitlab/ssl/git.yourdomain.tld.pem (decrypted private, public, intermediate) 7. Reload apache2 service

```
apache2 reload
```

From:  
<https://wiki.i-mscp.net/> - **i-MSCP Documentation**

Permanent link:  
[https://wiki.i-mscp.net/doku.php?id=start:howto:gitlab\\_with\\_i-mscp&rev=1504261221](https://wiki.i-mscp.net/doku.php?id=start:howto:gitlab_with_i-mscp&rev=1504261221)

Last update: **2017/09/01 11:20**

